




## GLADSTONE RANGE

### CABLED

REFERENCE	CABLES		RODS		OPEN AREA	WEIGHT
	DIAMETER	PITCH	DIAMETER	PITCH		
Gladstone 100/10	3 x 3 mm	110 mm	4 mm	14.5 mm	66%	9.5 Kg/M2
Gladstone 100/5	3 x 4 mm	112 mm	4 mm	8 mm	46%	13.6 Kg/M2
Gladstone 80/20	3 x 2 mm	80 mm	3 mm	20 mm	78%	5.4 Kg/M2
Gladstone 80/10	3 x 2 mm	80 mm	3 mm	10 mm	62%	6.1 Kg/M2
Gladstone 42/3	4 x 2 mm	50 mm	3 mm	6 mm	40%	9.8 Kg/M2
Gladstone 31/2	4 x 1 mm	35 mm	2 mm	4 mm	44%	5.6 Kg/M2
Gladstone 23/2	4 x 0.75 mm	24.5 mm	1.5 mm	3.5 mm	53%	4.3 Kg/M2

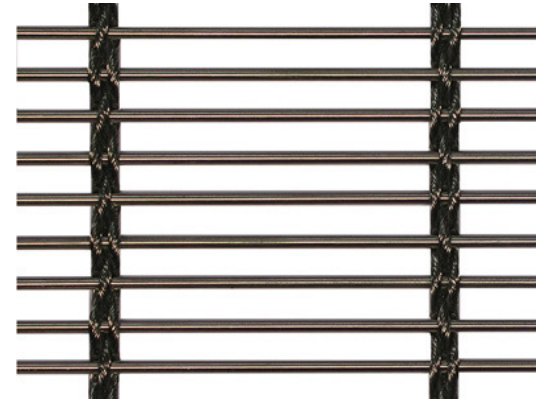

### PRE CRIMPED (PC)

REFERENCE	WIRES		RODS		OPEN AREA	WEIGHT
	DIAMETER	APERTURE	DIAMETER	APERTURE		
Gladstone PC 100/10	3 x 3 mm	91 mm	4 mm	10 mm	65%	9.3 Kg/M2
Gladstone PC 100/5	3 x 2 mm	94 mm	3 mm	5 mm	59%	9.8 Kg/M2
Gladstone PC 80/20	3 x 2.5 mm	67.5 mm	3 mm	17 mm	77%	5.5 Kg/M2
Gladstone PC 80/15	3 x 2.5 mm	67.5 mm	3 mm	11 mm	71%	6.0 Kg/M2
Gladstone PC 80/10	3 x 2.5 mm	67.5 mm	3 mm	7.4 mm	64%	7.4 Kg/M2
Gladstone PC 74/3.75	3 x 2 mm	74 mm	3 mm	3.75 mm	55%	9.3 Kg/M2
Gladstone PC 42/3	4 x 2 mm	42 mm	3 mm	3 mm	42%	12 Kg/M2
Gladstone PC 31/2	4 x 0.75mm	31 mm	1.5 mm	2 mm	53%	4.3 Kg/M2
Gladstone PC 23/2	3 x 1 mm	23 mm	1.6 mm	2 mm	53%	5.8 Kg/M2

