


Cromarty Laminate Architectural Mesh

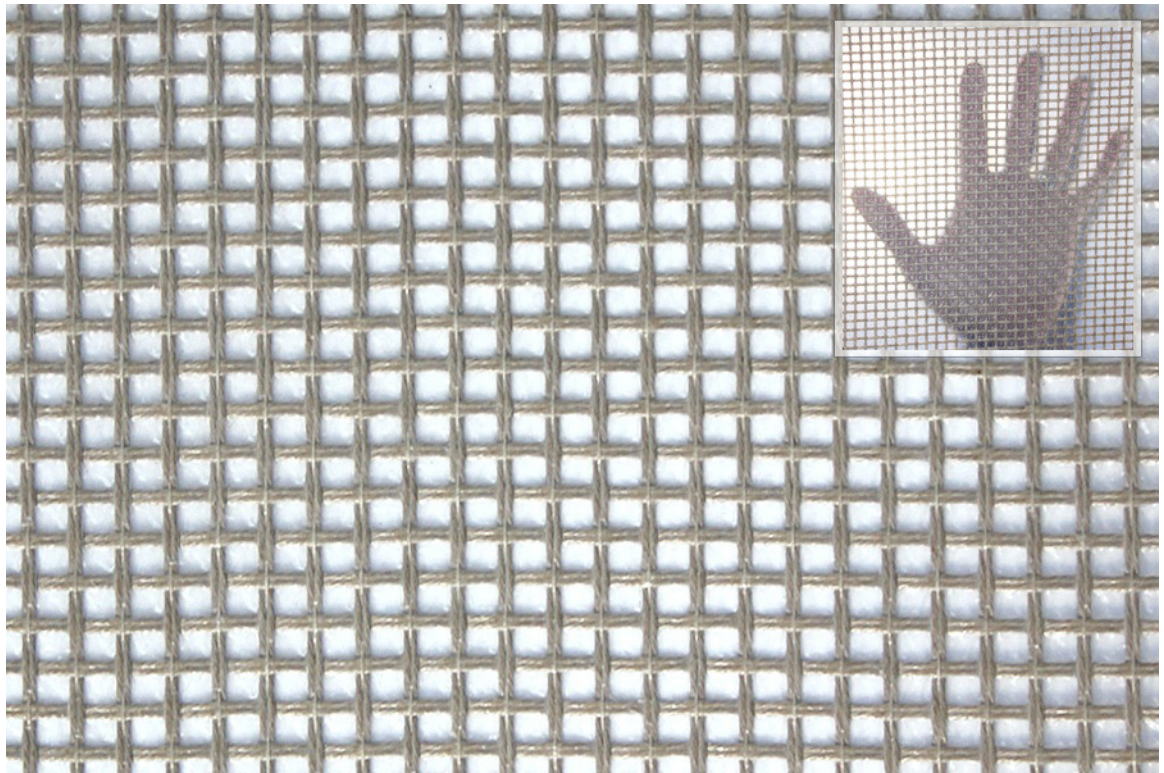

Scale 1:1 (Insert shows translucency)

Specification and Availability

Inner Core Material	Woven Glass Fibre	Outer Skin	PTFE laminated film
Tensile strength (warp/weft)	900Ncm	Tear strength (warp/weft)	DIN 53363 500N
Translucency	50%	Fire Rating	Class O
Temperature Range	-73 to 260 degrees C		

This product is available in many different forms and can be tailored to individual project requirements. The product colour will lighten over time (within 6 months) in typical UK conditions where the mesh is situated in direct sunlight.

Typical Applications

Textile cladding, ceilings, sun screening, translucent canopies.

Locker is a UK based supplier of architectural wire mesh products certified to BS EN ISO 9001:2008. With comprehensive in house AutoCAD facilities we are able to offer a complete package from development of the architectural wire mesh specification through design, fabrication, supply and installation of the finished screens.

www.architecturalwiremesh.com

Locker Architectural Ltd, Farrell Street, Warrington, WA1 2WW, United Kingdom
 sales@lockergroup.com Tel: +44 (0)1925 406600 Fax: +44 (0)1925 444386